

# F88

SELF CURING, NON-EPOXY  
PLASTIC ADHESIVE CEMENT

- SIMPLE 3-STEP MIXING
  - POWDER-LIQUIDSYSTEMS
  - NO PRESSURE OR HEAT TO CURE
  - STRENGTH IS CONSTANT REGARDLESS OF MIX RATIO
  - WILL NOT SHRINK OR SAG
  - RESISTANT TO MOST CHEMICALS
  - CAN BE SANDED, PAINTED, & DRILLED
  - THE ROUGHER THE SURFACE THE BETTER THE BOND
- Adheres to Wood, Concrete, Cinderblock, Steel, Iron, Aluminum, Stone, Plaster, Plastics, Piping, Wire, Glass.

## USED IN . . .


- ELECTRONICS • AERONAUTICS • MARINE FIELD • MACHINE SHOPS
- MEDICAL FIELD • INSTITUTIONS • TEST LABS
- PLASTIC & TOY INDUSTRY • MAINTENANCE DEPARTMENTS

F88 uses a two-part system of powder and liquid which, when mixed together in the proportions shown on the graph, will give you controlled setting times.

### INSTRUCTIONS FOR USE:

1. Parts to be filled or joined must be dry, free from oil or grease and unpainted. Remember, **the rougher the surface the better the bond.**
2. Mix in a disposable container. (Paper cups suggested.)
3. Mix for approximately 1 minute. (Should have a cream-like consistency.)
4. Mix only enough for a single application. If F88 becomes doughy, **do not use.**
5. With stick or brush apply to parts to be joined or filled. (Always apply in a wet, sticky mix.)
6. Allow to set without movement until hard.
7. While still soft, remove all excess cement with knife or cloth.

**CAUTION: Liquid is flammable.**  
**Keep away from heat and open flame.**

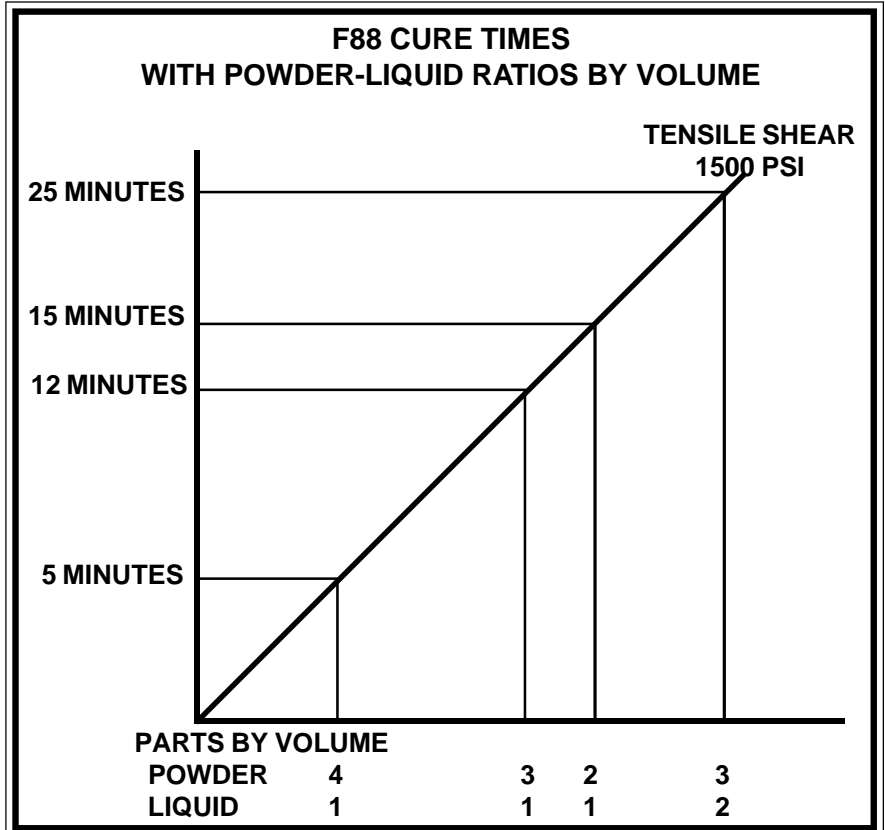

POWDER		LIQUID			
Item #1411001 .....	1 lb. Powder .....	\$27.62	Item #1411004 .....	16 fl. oz. Liquid .....	\$32.48
Item #1411002 .....	5 lb. Powder .....	\$91.63	Item #1411005 .....	64 fl. oz. Liquid .....	\$92.13
Item #1411003 .....	10 lb. Powder .....	\$162.02	Item #1411006 .....	1 gal. Liquid .....	\$164.55

Larger quantities - prices upon request.

REV 6/99

**TRIDOX**  
RESEARCH, DEVELOPMENT, MANUFACTURE  
**TRIDOX**  
**PRODUCTS**