

# F88

SELF CURING, NON-EPOXY  
PLASTIC ADHESIVE CEMENT

- POWDER-LIQUID SYSTEMS
- NO PRESSURE OR HEAT TO CURE
- STRENGTH IS CONSTANT REGARDLESS OF MIX RATIO
- WILL NOT SHRINK OR SAG
- RESISTANT TO MOST CHEMICALS
- CAN BE SANDED, PAINTED, & DRILLED
- THE ROUGHER THE SURFACE THE BETTER THE BOND Adheres to Wood, Concrete, Cinderblock, Steel, Iron, Aluminum, Stone, Plaster, Plastics, Piping, Wire, Glass.

## USED IN . . .


- ELECTRONICS • AERONAUTICS • MARINE FIELD • MACHINE SHOPS
- MEDICAL FIELD • INSTITUTIONS • TEST LABS
- PLASTIC & TOY INDUSTRY • MAINTENANCE DEPARTMENTS

F88 uses a two-part system of powder and liquid which, when mixed together in the proportions shown on the graph, will give you controlled setting times.

### INSTRUCTIONS FOR USE:

1. Parts to be filled or joined must be dry, free from oil or grease and unpainted. Remember, **the rougher the surface the better the bond.**
2. Mix in a disposable container. (Paper cups suggested.)
3. Mix for approximately 1 minute. (Should have a cream-like consistency.)
4. Mix only enough for a single application. If F88 becomes doughy, **do not use.**
5. With stick or brush apply to parts to be joined or filled. (Always apply in a wet, sticky mix.)
6. While still soft, remove all excess cement with knife or cloth.
7. Allow to set without movement until hard.

**CAUTION: Liquid is flammable.**  
**Keep away from heat and open flame.**

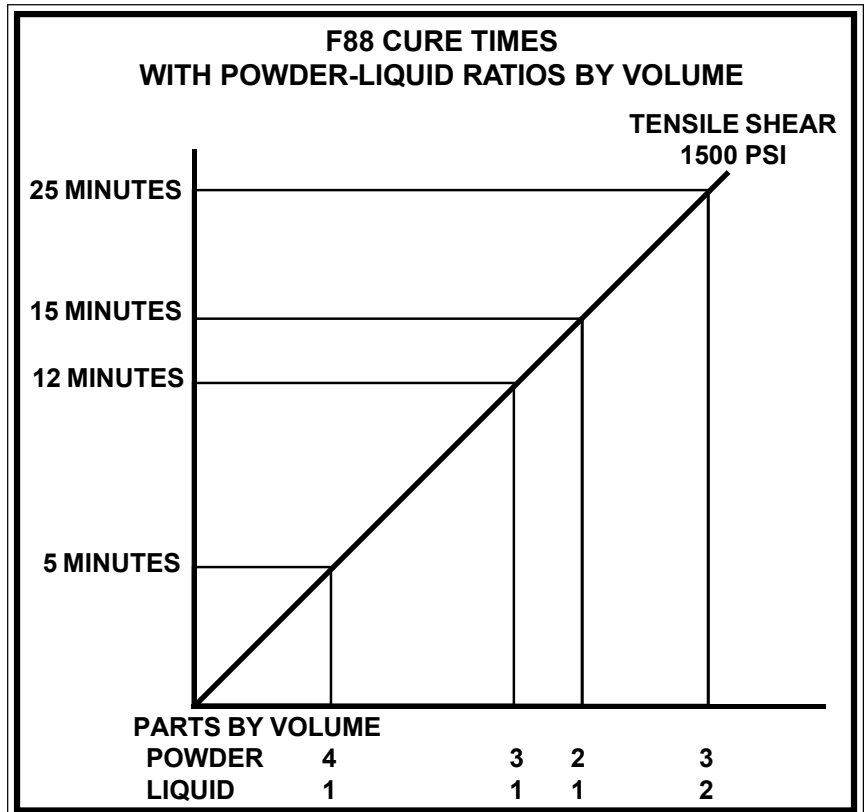

| POWDER        |              |          | LIQUID        |                   |          |
|---------------|--------------|----------|---------------|-------------------|----------|
| Item #1411001 | 1 lb. Powder | \$39.95  | Item #1411004 | 16 fl. oz. Liquid | \$42.95  |
| Item #1411003 | 10lb. Powder | \$215.00 | Item #1411006 | 1 gal. Liquid     | \$217.25 |

Larger quantities - prices upon request.

REV 1/21

# TRIDOX PRODUCTS

TWO UNION HILL ROAD BLDG. 2 • WEST CONSHOHOCKEN, PA 19428 USA • (610) 825-1856 • FAX: (610) 825-1958

DISTRIBUTOR INQUIRIES WELCOME